

jb® Box Type Met Polyester Film Capacitor – JFD

■ FEATURES

- Non-inductive, plastic case and epoxy resin.
- Box type provide the identical outer appearance.
- High reliability.

■ SPECIFICATIONS

- Reference Standard GB7332 (IEC 60384-2)
- Climatic Category 55/ 100/ 56
- Rated Voltage 63V, 100V, 160V, 250V, 400V, 630V.DC
- Capacitance Range 0.001 ~ 2.2 μ F
- Capacitance Tolerance $\pm 5\%$, $\pm 10\%$, $\pm 20\%$
- Voltage Proof 1.6U_R (5s)
- Insulation Resistance


U _R >100V	$\geq 30,000M\Omega$, C _R $\leq 0.33 \mu$ F $\geq 10,000s$, C _R >0.33 μ F	(20°C, 100V, 1min)
U _R $\leq 100V$	$\geq 15,000M\Omega$, C _R $\leq 0.33 \mu$ F $\geq 5,000s$, C _R >0.33 μ F	(20°C, 10V, 1min)

- Dissipation Factor

Frequency	C _R $\leq 0.1 \mu$ F	C _R >0.1 μ F
1KHz	$\leq 1.0\%$	$\leq 1.0\%$
10KHz	$\leq 1.5\%$	$\leq 1.5\%$
100KHz	$\leq 3.0\%$	---



■ DRAWING

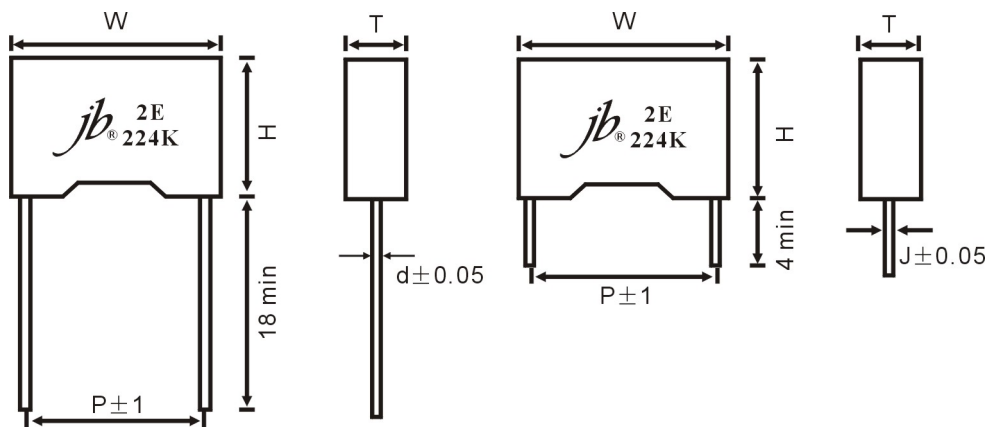

Please visit our website to get more update data, those data & specification are subject to change without notice.

jb® Capacitors Company

Web-site: www.jbcapacitors.com

E-mail: info@jbcapacitors.com

Tel : (852)2790 5091

Fax: (852)8169 8283

Box Type Met Polyester Film Capacitor – JFD

■ Dimensions (mm)

P:7.5

(Capacitor Thickness) T	≤3.5	>3.5
(Lead Wire Dia.) d±0.05	0.5	0.6
(Dimension Tolerance: W, H, T)	W +0.5/-0.7, H±0.5, T±0.5	

VDC Mfd	63VDC				100VDC				250VDC				400VDC				630VDC			
	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P
0.0033	--	--	--	--	--	--	--	--	--	--	--	--	--	v	--	--	10.0	8.0	4.0	7.5
0.0047	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	10.0	8.0	4.0	7.5
0.0068	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	10.0	8.0	4.0	7.5
0.010	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	10.0	9.0	4.0	7.5
0.015	--	--	--	--	--	--	--	--	--	--	--	--	10.0	8.0	4.0	7.5	10.0	11.0	5.0	7.5
0.022	--	--	--	--	--	--	--	--	--	--	--	--	10.0	8.0	4.0	7.5	10.0	12.0	6.0	7.5
0.033	--	--	--	--	--	--	--	--	--	--	--	--	10.0	9.0	4.0	7.5	--	--	--	--
0.047	--	--	--	--	--	--	--	--	10.0	8.0	4.0	7.5	10.0	11.0	5.0	7.5	--	--	--	--
0.068	--	--	--	--	--	--	--	--	10.0	8.0	4.0	7.5	10.0	11.0	5.0	7.5	--	--	--	--
0.10	--	--	--	--	10.0	8.0	4.0	7.5	10.0	9.0	4.0	7.5	10.0	12.0	6.0	7.5	--	--	--	--
0.15	--	--	--	--	10.0	8.0	4.0	7.5	10.0	11.0	5.0	7.5	--	--	--	--	--	--	--	--
0.22	10.0	8.0	4.0	7.5	10.0	9.0	4.0	7.5	10.0	12.0	6.0	7.5	--	--	--	--	--	--	--	--
0.33	10.0	8.0	4.0	7.5	10.0	11.0	5.0	7.5	--	--	--	--	--	--	--	--	--	--	--	--
0.47	10.0	9.0	4.0	7.5	10.0	12.0	6.0	7.5	--	--	--	--	--	--	--	--	--	--	--	--
0.68	10.0	11.0	5.0	7.5	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
1.0	10.0	12.0	6.0	7.5	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

P=10.0, 15.0

(Capacitor Thickness) T	10.0	15.0
(Lead Wire Dia.) d±0.05	0.6	0.8
(Dimension Tolerance: W, H, T)	W +0.5/-0.7, H±0.5, T±0.5	

VDC Mfd	63VDC				100VDC				160VDC				250VDC				400VDC				630VDC			
	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P
0.0047	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	13.0	9.0	4.0	10.0	
0.0068	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	13.0	9.0	4.0	10.0	
0.01	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	13.0	9.0	4.0	10.0	
0.015	--	--	--	--	--	--	--	--	--	--	--	--	--	13.0	9.0	4.0	10.0	13.0	11.0	5.0	10.0			
0.022	--	--	--	--	--	--	--	--	--	--	--	--	--	13.0	9.0	4.0	10.0	13.0	12.0	6.0	10.0			
0.033	--	--	--	--	--	--	--	--	--	--	--	13.0	9.0	4.0	10.0	13.0	11.0	5.0	10.0	18.0	11.0	5.0	15.0	
0.047	--	--	--	--	--	--	--	--	--	--	--	13.0	9.0	4.0	10.0	18.0	11.0	5.0	15.0	18.0	12.0	6.0	15.0	
0.068	--	--	--	--	--	--	--	--	--	--	--	13.0	9.0	4.0	10.0	18.0	11.0	5.0	15.0	18.0	13.5	7.5	15.0	
0.10	--	--	--	--	13.0	9.0	4.0	10.0	13.0	9.0	4.0	10.0	18.0	11.0	5.0	15.0	18.0	12.0	6.0	15.0	--	--	--	--
0.15	--	--	--	--	13.0	9.0	4.0	10.0	13.0	11.0	5.0	10.0	18.0	11.0	5.0	15.0	18.0	13.5	7.5	15.0	--	--	--	--
0.22	13.0	9.0	4.0	10.0	13.0	11.0	5.0	10.0	13.0	11.0	5.0	10.0	18.0	11.0	5.0	15.0	--	--	--	--	--	--	--	--
0.33	13.0	9.0	4.0	10.0	18.0	11.0	5.0	15.0	18.0	11.0	5.0	15.0	18.0	12.0	6.0	15.0	--	--	--	--	--	--	--	--
0.47	13.0	11.0	5.0	10.0	18.0	11.0	5.0	15.0	18.0	12.0	6.0	15.0	--	--	--	--	--	--	--	--	--	--	--	--
0.68	18.0	11.0	5.0	15.0	18.0	12.0	6.0	15.0	18.0	13.5	7.5	15.0	--	--	--	--	--	--	--	--	--	--	--	--
1.0	18.0	11.0	5.0	15.0	18.0	13.5	7.5	15.0	18.0	14.0	8.5	15.0	--	--	--	--	--	--	--	--	--	--	--	--
1.5	18.0	12.0	6.0	15.0	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
2.2	18.0	13.5	7.5	15.0	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Please visit our website to get more update data, those data & specification are subject to change without notice.