


High Voltage Met Polypropylene Film Capacitor – JFP

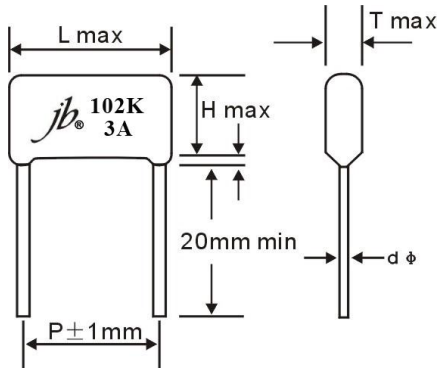

(dφ: 0.6mm or 0.8mm)

FEATURES

- Extended foil, flame retardant epoxy coated.
- Ideal for high AC current applications, such as CRT deflection for R-F generators and pulse-forming networks.
- Coated with flame retardant epoxy resin which provides from humidity and mechanical damage.
- Temperature coefficient is negative and variety linear over the operation temperature.

SPECIFICATIONS

Operating Temperature	-40°C ~ +85°C
Rated Voltage	1000V, 1250V, 1600V, 2000V.DC
Capacitance Range	0.001 ~ 0.15μF
Capacitance Tolerance	±5%, ±10%
Dissipation Factor	≤0.1% (20°C, 1KHz)
Insulation Resistance	≥25000MΩ (CR≤0.1μF), (20°C, 1min) ≥2000s (CR>0.1μF), (20°C, 1min)

STANDARD SIZE (mm)

VDC Mfd	1000VDC / 1250VDC				1500VDC / 1600VDC				2000VDC			
	L	T	H	P	L	T	H	P	L	T	H	P
0.00022									19	10.5	5.5	15
0.00047~ 0.00056	19	7.5	12	15	19	7.5	12	15	19	7.5	12	15
0.001	19	6.4	11	15	19	6.4	11	15	19	7	12.5	15
0.0011									19	7.5	13	15
0.0015	19	7.5	12	15	19	7.5	12	15	19	8.5	13.5	15
0.0022	19	7.5	12.5	15	19	7.5	12.5	15	19	8.5	14	15
0.0027	19	8	13	15	19	8	13	15	19	9	14.5	15
0.0033	19	7.6	12	15	19	8.5	14	15	19	9	16	15
0.0039									24	7.5	15	20
0.0047	19	8	13	15	19	9	14.5	15	19	9	14.5	15
0.0052					19	9	14.8	15	19	9.5	16	15
0.0056~ 0.0068	19	8.5	14.5	15	19	10	15.7	15	19	11	18	15
0.0082	19	9	14.5	15	19	9.5	15.5	15	19	11	18	15
0.0091					26	9.5	15.5	22.5				
0.0095					26	10	16	22.5				
0.01	19.5	8.5	14	15	19	9.5	17	15	19	12	19	15
0.011~ 0.012									26	9.5	16.5	22.5
0.013~ 0.016	26	9	15.5	22.5	26	9	15.5	22.5	26	10.5	18	22.5
0.022	19	9.5	16.8	15	19	11.5	18.5	15				
0.033	26	9.5	16.5	22.5	26	10	16	22.5	26	11	18.5	22.5
0.047	19.5	15.8	10.5	15								
	26	10.8	18	22.5	26	10.5	18.5	22.5	26	13.5	20	22.5
	19	13	18	15								
	19	13.5	20.6	15								

Please visit our website to get more update data, those data & specification are subject to change without notice.