


Luxury Aluminum Foil and Film Metallized Polypropylene Capacitors – Axial - JLX

FEATURES

- Top of the range pure aluminum foil capacitor,
- Very Low Dielectric absorption factor
- Very Low Dissipation factor, Very Low ESR, Very Low Inductance
- A luxury capacitor designed especially for modern high-end tweeters and mid-range drivers

SPECIFICATIONS

Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55°C ~ +85°C
Capacitance range	1 ~ 10uF
Capacitance tolerance	±3% 1KHz
Rated voltage	100V、200V.DC
Withstand voltage	1.6VR 5S
Dissipation factor	≤0.0002 1KHz
Insulate the electric resistance	CR≤0.33 μ F, I.R≥15,000MΩ CR>0.33 μ F, I.R≥5,000S
Leads Diameter	1.0 Tinned Pure Copper Wire

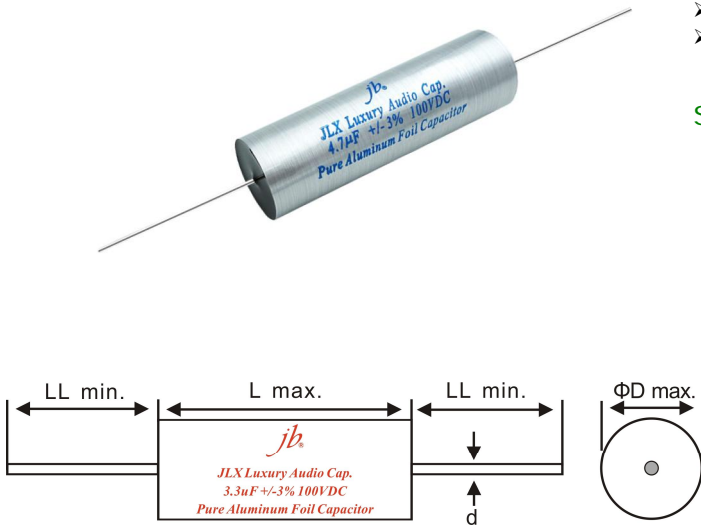

STANDARD SIZE TABLE (mm)

μF	100V				
	Dissipation	OD	L	d	LL
1.0uF	≤0.0002	15	51	1.0	45
1.5uF	≤0.0002	19	51	1.0	45
1.8uF	≤0.0002	18	58	1.0	45
2.0uF	≤0.0002	19	58	1.0	45
2.2uF	≤0.0002	20	58	1.0	45
2.7uF	≤0.0002	21	58	1.0	45
3.0uF	≤0.0002	20	74	1.0	45
3.3uF	≤0.0002	22	74	1.0	45
4.0uF	≤0.0002	22.5	74	1.0	45
4.7uF	≤0.0002	24	74	1.0	45
5.0uF	≤0.0002	25	74	1.0	45
5.6uF	≤0.0002	27	74	1.0	45
6.0uF	≤0.0002	25	86	1.0	45
6.8uF	≤0.0002	26	86	1.0	45
7.0uF	≤0.0002	28	86	1.0	45
8.0uF	≤0.0002	29	86	1.0	45
8.2uF	≤0.0002	29.5	86	1.0	45
9.0uF	≤0.0002	31	86	1.0	45
10.0uF	≤0.0002	35	86	1.0	45
μF	200V				
	Dissipation	OD	L	d	LL
1.0uF	≤0.0002	23.5	36	1.0	45
2.2uF	≤0.0002	22	65	1.0	45
3.3uF	≤0.0002	27	65	1.0	45
4.7uF	≤0.0002	27	86	1.0	45
5.6uF	≤0.0002	29	86	1.0	45
6.8uF	≤0.0002	31.8	86	1.0	45