


Radial Aluminum Electrolytic Capacitor – JRD

FEATURES

- At 55°C (Φ5~Φ6: 2000hours Φ8~Φ10: 3000hours) Ultra lower impedance
- Low Impedance, Long Life
- Load life of 5000 hours at 105°C
- Switch power supply
- Excellent ripple current capability

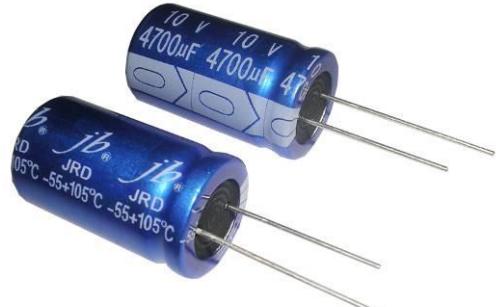

SPECIFICATIONS

Operating Temperature Range (°C) -55°C ~ +105°C

Rated Voltage Range (V) 6.3 ~ 100

Capacitance Range (μF) 0.47 ~ 15000

Capacitance Tolerance (25°C, 120Hz) ±20%

Leakage Current (μA) 1≤0.02CV or 3uA, whichever is greater (after 2 minutes at 25°C)

Where, C: Nominal Capacitance (μF) V: Rated Voltage (V)

Dissipation Factor (25°C, 120Hz)

| Wv (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 |
|--------|------|------|------|------|------|------|------|------|
| Tan δ | 0.22 | 0.19 | 0.16 | 0.14 | 0.12 | 0.10 | 0.09 | 0.08 |

0.02 is added to each 1000 μF increase over 1000 μF

Temperature Stability (120Hz)

| Rated Voltage | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 |
|---------------|-----|----|----|----|----|----|----|-----|
| Z-55°C/Z+20°C | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |


Load Life (+105°C)

| | |
|--------------------|--|
| Time | 5000hours (Φ5~6: 2000hours Φ8~10: 3000hours) |
| Leakage Current | Not more than the specified value. |
| Capacitance Change | Within±20% of the initial value |
| Dissipation Factor | Not more than 200% of the specified value. |

Shelf Life (+105°C) After leaving capacitors under no load at 105°C for 1000 hours, they meet the specified value for load life Characteristics listed above.

*after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement.

DIMENSIONS (mm)

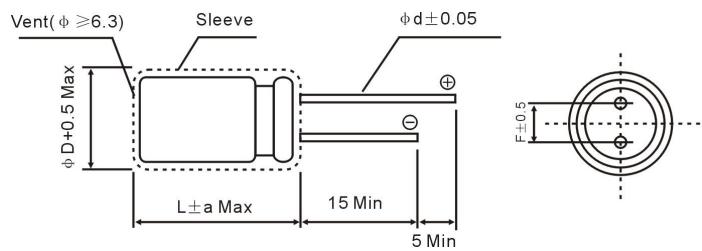

| ØD | 5 | 6.3 | 8 | 10 | 13 | 16 | 18 |
|----|-----|-----|-----|-----|-----|-----|----|
| F | 2.0 | 2.5 | 3.5 | 5.0 | | 7.5 | |
| Ød | 0.5 | 0.5 | 0.6 | | 0.8 | | |
| a | 1.0 | 1.0 | | 2.0 | | | |

MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

| Freq(Hz) Cap(μF) | 120 | 1K | 10K | 100K |
|---------------------|------|------|------|------|
| 0.47~4.7 | 0.40 | 0.68 | 0.78 | 1.0 |
| 5.6~47 | 0.50 | 0.76 | 0.87 | 1.0 |
| 56~270 | 0.70 | 0.85 | 0.90 | 1.0 |
| 330~1000 | 0.80 | 0.93 | 0.98 | 1.0 |
| 1200~15000 | 0.90 | 0.95 | 1.0 | 1.0 |

| Dia | Life Time |
|-------|-----------|
| 5~6.3 | 2000h |
| 8~10 | 3000h |
| ≥13 | 5000h |

Temperature coefficient

| Temperature | +70 | +85 | +105 |
|-------------|------|------|------|
| Factor | 1.96 | 1.68 | 1.0 |

Please visit our website to get more update data, those data & specification are subject to change without notice.

Radial Aluminum Electrolytic Capacitor – JRD

STANDARD RATINGS

| μF | V | 6.3V | 10V | 16V | 25V | 35V | 50V | 63V | 100V |
|---------------|-------|--------|-------|--------|--------|----------------|-------|-------|-------|
| 1 | -- | -- | -- | -- | -- | -- | 5x11 | -- | |
| 2.2 | -- | -- | -- | -- | -- | -- | 5x11 | -- | |
| 3.3 | -- | -- | -- | -- | -- | -- | 5x11 | -- | |
| 4.7 | -- | -- | -- | -- | -- | 5x11 | 5x11 | -- | |
| 6.8 | -- | -- | -- | -- | -- | 5x11 | 5x11 | -- | |
| 10 | -- | -- | -- | -- | -- | 5x11 | 5x12 | 5x12 | 6x11 |
| 15 | -- | -- | -- | -- | -- | 5x11 | 5x12 | -- | |
| 18 | -- | -- | -- | -- | -- | 5x11 | 5x12 | -- | |
| 22 | -- | -- | -- | -- | 5x11 | 5x11 | 6x11 | 6x11 | 8x12 |
| 27 | -- | -- | -- | -- | -- | 5x11 | 6x11 | -- | |
| 33 | -- | -- | -- | -- | -- | 6x11 | 6x11 | 6x11 | 10x13 |
| 39 | -- | -- | -- | -- | -- | 6x11 | 6x11 | -- | |
| 47 | -- | -- | 5x11 | 5x11 | 6x11 | 6x11 | 8x12 | 8x12 | 10x17 |
| 56 | -- | -- | 5x11 | 5x11 | 6x11 | 6x12 | -- | | |
| 68 | -- | -- | 5x12 | 5x12 | 6x11 | 8x12 | 10x13 | 10x21 | |
| 82 | -- | -- | -- | 6.3x11 | 6.3x11 | 8x12 | -- | | |
| 100 | -- | 5x11 | 6x11 | 6x11 | 8x12 | 8x12 | 10x17 | 13x20 | |
| 120 | -- | 5x11 | 6x11 | 6.3x11 | 8x12 | 8x20 | -- | | |
| 150 | 5x11 | 5x11 | 6x11 | 8x12 | 8x12 | 8x20 | -- | | |
| 180 | 5x11 | 6.3x11 | 6x11 | 8x12 | 8x14 | 8x20 | -- | | |
| 220 | 6x11 | 6x11 | 6x11 | 8x12 | 10x15 | 10x17 | 10x21 | 16x26 | |
| 270 | 6x11 | 6.3x11 | 8x12 | 8x14 | 10x15 | 10x21 | -- | | |
| 330 | 6x11 | 8x12 | 8x12 | 8x14 | 10x17 | 10x21 | 13x20 | 16x26 | |
| 390 | 6x12 | 8x12 | -- | 8x20 | 10x17 | 13x20 | -- | | |
| 470 | 8x12 | 8x12 | 8x12 | 10x17 | 10x17 | 13x20 13x21 | 13x20 | 16x31 | |
| 560 | 8x12 | 8x12 | 8x16 | 8x20 | 10x25 | 13x21 | -- | | |
| 680 | 8x12 | 8x12 | 8x16 | 10x17 | 13x20 | 13x30 | 16x26 | | |
| 820 | 8x14 | 8x16 | 8x20 | 10x25 | 13x20 | 13x35 | -- | | |
| 1000 | 8x16 | 8x16 | 10x17 | 13x20 | 13x25 | 16x25 | 16x26 | | |
| 1200 | 8x16 | 10x17 | 10x21 | 13x20 | 16x25 | 13x30 | 16x30 | | |
| 1500 | 8x16 | 10x21 | 13x20 | 13x20 | 13x35 | 16x26 | -- | | |
| 1800 | 10x15 | 10x25 | 13x20 | 13x26 | 16x26 | 16x32 | -- | | |
| 2200 | 10x20 | 13x20 | 13x20 | 13x26 | 16x26 | 16x35 | 18x40 | | |
| 2700 | 10x21 | 13x21 | 16x26 | 13x26 | 16x35 | 18x40 | -- | | |
| 3300 | 13x20 | 13x20 | 13x30 | 16x26 | 16x35 | 18x40 | -- | | |
| 3900 | 13x25 | -- | 16x26 | 16x26 | 18x40 | -- | -- | | |
| 4700 | 13x25 | 13x26 | 16x26 | 16x26 | -- | -- | -- | | |
| 5600 | 16x26 | 16x30 | 16x35 | -- | -- | -- | -- | | |
| 6800 | 16x26 | 16x30 | 18x25 | -- | -- | -- | -- | | |
| 8200 | 16x32 | 16x35 | -- | -- | -- | -- | -- | | |
| 10000 | 16x35 | -- | -- | -- | -- | -- | -- | | |

Please visit our website to get more update data, those data & specification are subject to change without notice.

Radial Aluminum Electrolytic Capacitor – JRD

Typical Curves

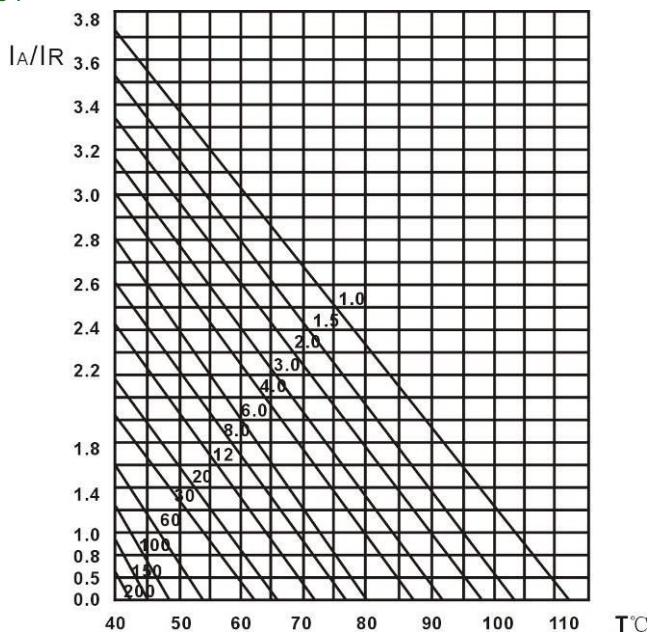


Fig. 4 Multiplier of useful life as a function of ambient

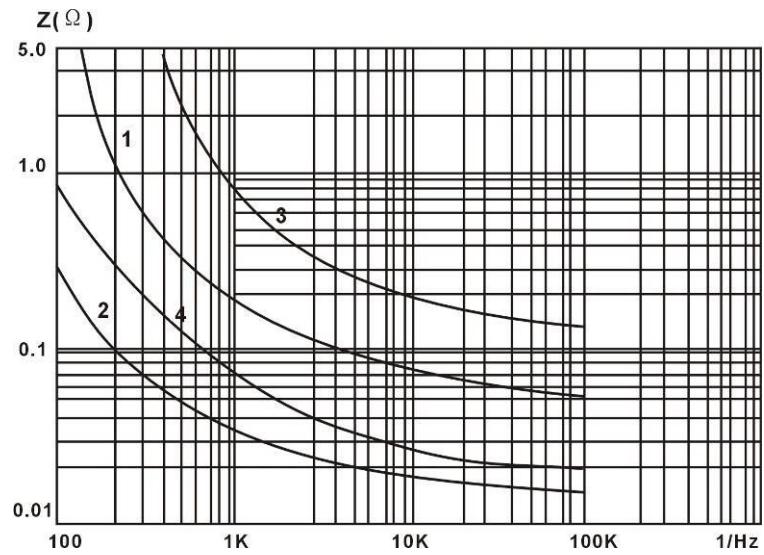


Fig. 3 Typical impedance as a function of frequency

- | | | |
|----|------------|---------|
| 1. | 10V1000μF | 10x20 |
| 2. | 10V10000μF | 18x35.5 |
| 3. | 63V100μF | 10x20 |
| 4. | 63V1000μF | 18x35.5 |

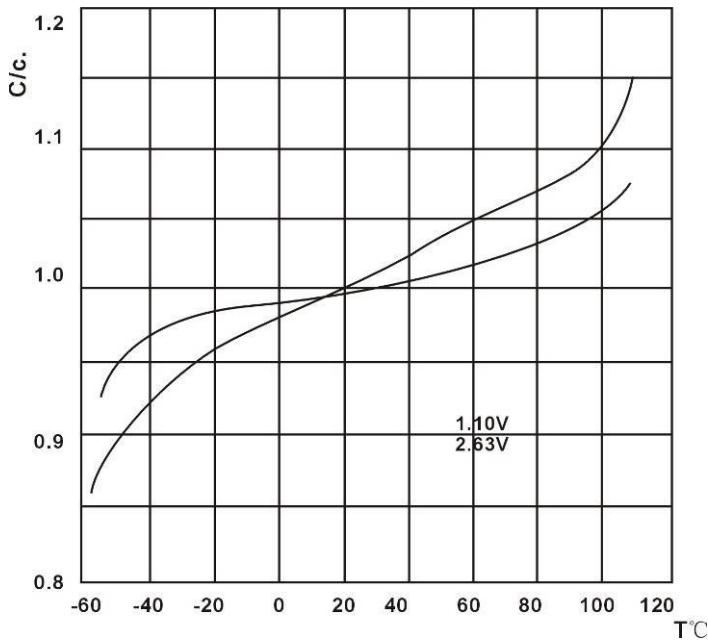


Fig. 1 Typical multiplier of capacitance as a function of ambient temperature

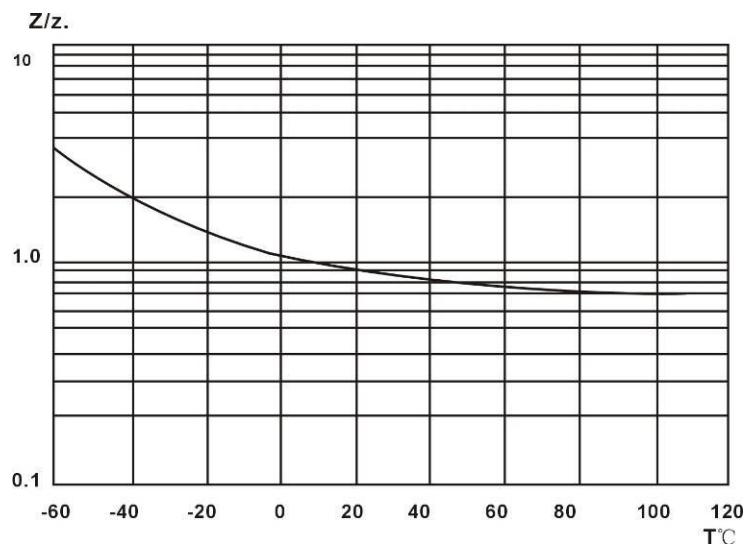
 C_0 = capacitance at 25°C, 120Hz

Fig. 2 Typical multiplier of impedance as a function of ambient temperature

 Z_0 –typical impedance to 25°C, 100KHz

Please visit our website to get more update data, those data & specification are subject to change without notice.