

jb® Aluminum Electrolytic Capacitor – JSU




■ FEATURES

- For Photo Flash
- High Stability
- Compact and light weight

■ SPECIFICATIONS

Items	Performance Characteristics	
Operating Temperature Range (°C)	-20°C ~ +55°C	
Rated Voltage	330WV.DC	360WV.DC
Voltage Proof	350SV.DC	390SV.DC
Capacitance Tolerance (20°C, 120Hz)	-10%~+20%	
Dissipation Factor (20°C, 120Hz)	Capacitance : 150~600µF	Less than 0.1
	: 700~1500µF	Less than 0.15
Leakage Current	I=1xC (20°C, after 5 minutes) Max	
	I: Leakage Current (µA)	C: Rated Capacitance (µF)

■ DIMENSIONS (mm)

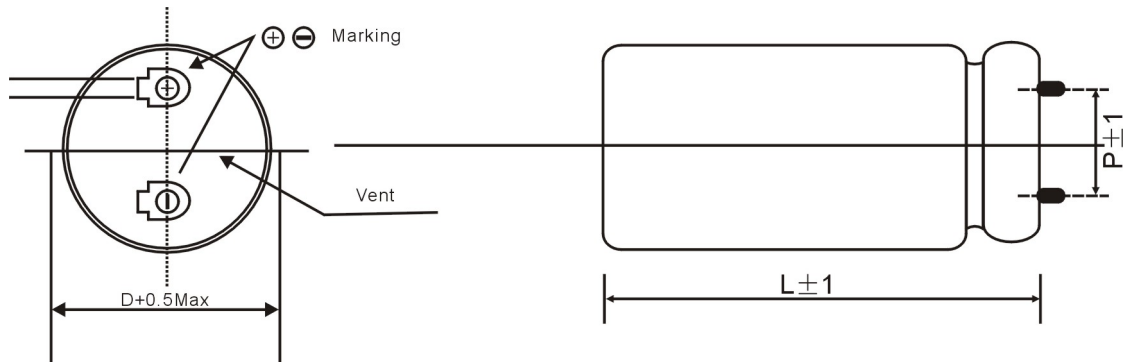

■ STANDARD RATINGS

330WV.DC(350SV.DC)							360WV.DC(390SV.DC)							
Capacitance (µF)	ΦD(mm)	20	22	25	30	35	Capacitance (µF)	ΦD(mm)	20	22	25	30	35	
	P	8	10	10	10	10		P	8	10	10	10	10	
150	L (mm)	25	--	--	--	--	150	L (mm)	30	25	--	--	--	
180		30	25	--	--	--	180		35	30	25	--	--	--
200		35	30	25	--	--	200		35	30	30	--	--	--
250		40	30	30	--	--	250		40	35	30	25	--	--
300		45	35	30	25	--	300		50	40	35	30	--	--
350		50	40	35	25	--	350		--	45	40	30	25	--
400		--	45	40	30	25	400		--	50	45	35	25	--
450		--	50	45	30	25	450		--	--	50	35	30	--
500		--	--	50	35	25	500		--	--	60	40	30	--
600		--	--	55	35	30	600		--	--	--	40	35	--
700		--	--	--	40	30	700		--	--	--	45	35	--
800		--	--	--	45	35	800		--	--	--	50	40	--
900		--	--	--	45	35	900		--	--	--	60	40	--
1000		--	--	--	50	40	1000		--	--	--	60	45	--
1200		--	--	--	60	45	1200		--	--	--	--	50	--
1300		--	--	--	--	45	1300		--	--	--	--	55	--
1500	--	--	--	--	50	1500	--	--	--	--	60	--		

Please visit our website to get more update data, those data & specification are subject to change without notice.

jb® Capacitors Company

Web-site: www.jbcapacitors.com

E-mail: info@jbcapacitors.com

Tel : (852)2790 5091

Fax: (852)8169 8283