

# Radial Aluminum Electrolytic Capacitor – JRJ

DISCONTINUED MODEL

## FEATURES

- Load life of 1000 hours at 85°C
- L: 7mm standard products
- VTR, video cameras car radios, micro cassette tape recorder etc.



## SPECIFICATIONS

Operating Temperature Range (°C) -40°C ~ +85°C  
 Capacitance Tolerance (25°C, 120Hz) ±20%  
 Leakage Current (µA) 0.01CV or 3 whichever is greater. (at 20°C, after 2 minutes)  
 C: Nominal Capacitance (µF) V: Rated Voltage (V)

Dissipation Factor (20°C, 120Hz)	Rated Voltage (V)	6.3	10	16	25	35	50	63
	Tan δ		0.24	0.20	0.16	0.14	0.12	0.10

Temperature Stability (Impedance ratio at 120Hz)	Rated Voltage (V)	6.3	10	16	25	35	50	63
	Z-25°C/Z+20°C	4	3	2	2	2	2	2
	Z-40°C/Z+20°C	8	6	4	4	3	3	3


Load Life (+85°C) After applying rated voltage for 1000 hours at +85°C and then resumed 16 hours:

Capacitance Change	±25% of the initial measured value
Leakage Current	≤The initial specified value
Dissipation Factor	≤200% of the initial specified value

Shelf Life (+85°C) After storage for 1000 hours at +85°C and then resumed 16 hours:

Capacitance Change	±25% of the initial measured value
Leakage Current	≤200% of the initial specified value
Dissipation Factor	≤200% of the initial specified value

## DIMENSIONS (mm)

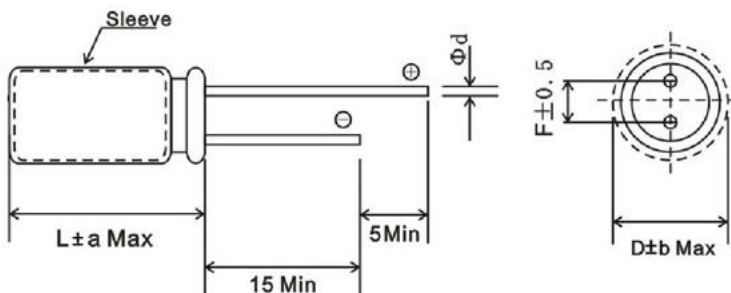

ΦD	4	5	6.3	8
F	1.5	2.0	2.5	3.5
Φd±0.05	0.4/0.45			
a Max	+1.5 -1.0			
b Max	0.5			

## MULTIPLIER FOR RIPPLE CURRENT

### Frequency coefficient

Frequency (Hz)	60	120	1K	≥10K
Cap(µF)				
0.1~68	0.80	1.0	1.3	1.5
100~470	0.80	1.0	1.15	1.2

Please visit our website to get more update data, those data & specification are subject to change without notice.

## Radial Aluminum Electrolytic Capacitor – JRJ

### STANDARD RATINGS

Wv (V)	4		6.3		10		16		25	
	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple
	DxL	mArms	DxL	mArms	DxL	mArms	DxL	mArms	DxL	mArms
0.1	--	--	--	--	--	--	--	--	--	--
0.22	--	--	--	--	--	--	--	--	--	--
0.33	--	--	--	--	--	--	--	--	--	--
0.47	--	--	--	--	--	--	--	--	--	--
1	--	--	--	--	--	--	--	--	--	--
2.2	--	--	--	--	--	--	--	--	--	--
3.3	--	--	--	--	--	--	--	--	4x7	15
4.7	--	--	--	--	--	--	--	--	4x7	20
10	--	--	--	--	--	--	4x7	35	4x7	30
22	--	--	4x7	35	4x7	35	4x7	40	5x7	50
33	4x7	35	4x7	40	4x7	45	5x7	55	6.3x7	70
47	4x7	40	4x7	50	4x7	51	5x7	70	6.3x7	85
100	5x7	70	5x7	80	6.3x7	108	6.3x7	120	8x7	145
220	6.3x7	120	6.3x7	140	8x7	185	8x7	205	--	--
330	8x7	170	7x7	205	--	--	--	--	--	--

Wv (V)	35		50		63		100	
	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple
	DxL	mArms	DxL	mArms	DxL	mArms	DxL	mArms
0.1	--	--	4x7	4	4x7	4	--	--
0.22	--	--	4x7	5	4x7	6	--	--
0.33	--	--	4x7	7	4x7	7	--	--
0.47	--	--	4x7	8	4x7	8	--	--
1	--	--	4x7	10	4x7	10	4x7	12
2.2	--	--	4x7	15	4x7	15	5x7	20
3.3	4x7	15	4x7	20	4x7	23	6.3x7	30
4.7	4x7	20	4x7	24	5x7	30	6.3x7	
10	4x7	30	5x7	40	6.3x7	50	--	--
22	5x7	55	6.3x7	70	--	--	--	--
33	6.3x7	75	8x7	100	--	--	--	--
47	8x7	110	--	--	--	--	--	--
100	--	--	--	--	--	--	--	--
220	--	--	--	--	--	--	--	--
330	--	--	--	--	--	--	--	--

Please visit our website to get more update data, those data & specification are subject to change without notice.