

JBR-3318-Round Trimming Potentiometer-6mm

FEATURES

- Single Turn/ Phenolic/ Industrial/ Sealed
- 2 Terminal Styles




Electrical Characteristics	
Standard Resistance Range	100Ω - 1MΩ
Resistance Tolerance	±30%
Contact Resistance Variation	10% max
Resistance	Infinite
Adjustment Angle	210°±20°

Environmental Characteristics	
Power Rating	100-500KΩ ----- 50V
	>500KΩ ----- 25V
	50°C ----- 0.1W
Temperature Range	-10°C to +70°C
Temperature Coefficient	±1000ppm/°C
Load Life	240 hours 0.1Watt 50°C (+5% ~ 20%)

Physical Characteristics	
Torque (Operating)	20-250 g-cm
Terminals	Solderable pins
Marking	Resistance code, date code
Standard packaging	500pcs. Per bag
Aqueous cleaning not recommended	

JBR-3318K

FRONT VIEW

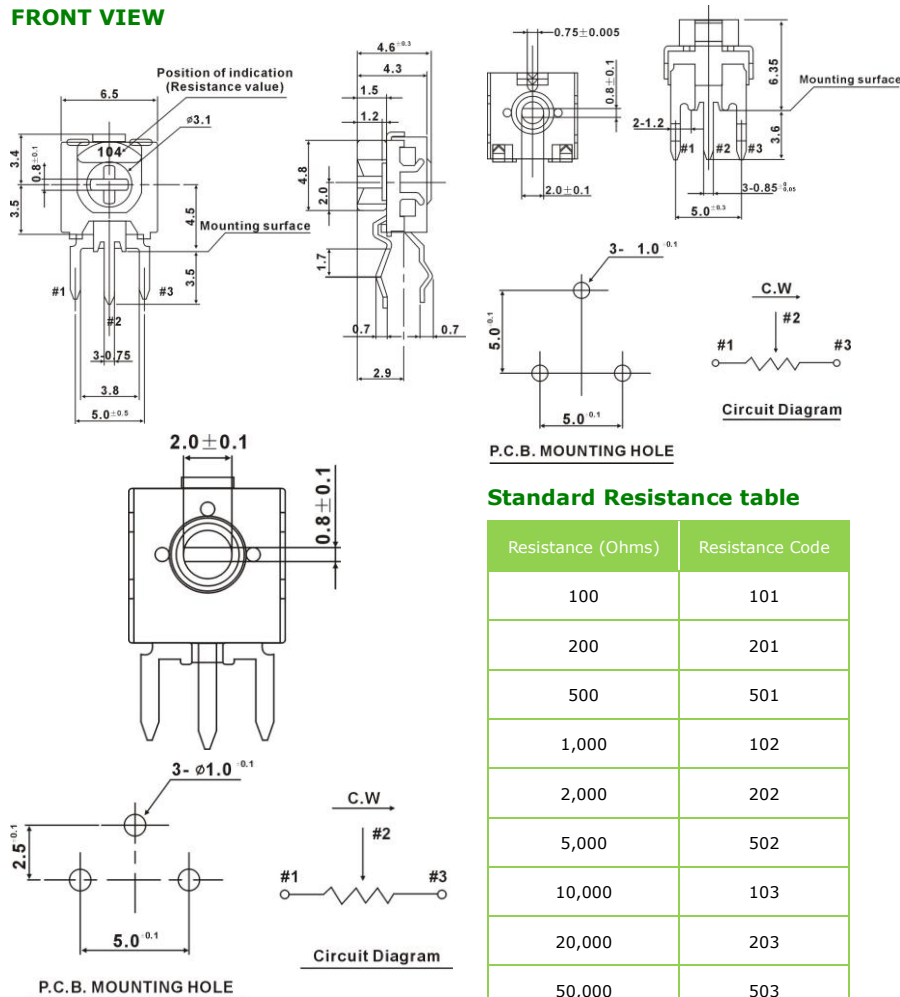


Standard Resistance table

Resistance (Ohms)	Resistance Code
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105

Special resistances available


How to Order

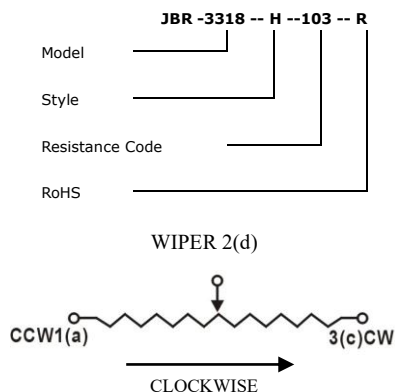

Tolerance is ±0.25 if no identification

JBR-3318F

FRONT VIEW

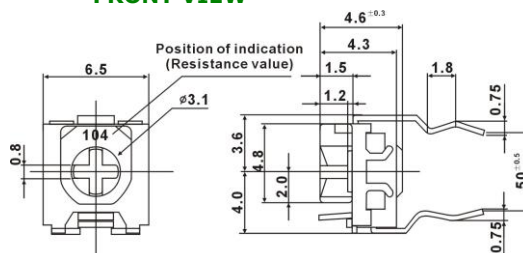

Note: Please visit our website to get more update data, those data & specification are subject to change without notice.