

# SMD Aluminum Electrolytic Capacitor – JCF

## FEATURES

- Endurance : 105°C 2000~5000H
- Extra Low Impedance
- Designed for reflow soldering
- Designed for surface mounting on high-density PCB



Fig 1

Fig 2

Fig 3

Note: Fig 1 & 2: Diameter 4 ~10mm

Fig 3 : Diameter: ≥12.5mm

## SPECIFICATIONS

Operating Temperature -55°C ~ +105°C  
 Voltage Range 6.3V ~ 100V.DC  
 Capacitance Tolerance ±20% at 120Hz, 20°C  
 Leakage Current The greater value of either 0.01CV or 3μA  
 Condition: μA/after 2minutes (max)  
 Dissipation Factor (Tan δ) Measurement Frequency: 120Hz, Temperature: 20°C

Rated Voltage (V)	6.3	10	16	25	35	50	63	80	100
Surge voltage (V)	7.3	11.5	18.4	28.8	40.3	57.5	72.5	92	115
Tanδ (MAX)	Ø4~Ø10	0.28	0.24	0.20	0.16	0.14	0.12	0.12	0.12
	Ø12.5~Ø16	0.34	0.29	0.22	0.20	0.16	0.12	0.14	0.14

Impedance ratio at low temperature

Based on the value at 120Hz, +20°C

Rated Voltage (V)		6.3, 10, 16	25, 35, 50	63, 80, 100
Impedance Ratio ZT / Z20 (Max.)	Z (-25°C) / Z(20°C)	4	2	2
	Z (-55°C) / Z(20°C)	8	4	3

Endurance

After applying rated working voltage for 2000/3000/5000 hours at +105°C±2°C, and then being stabilized at +20°C, capacitors shall meet the following limits

Test	ΦD x L ≤6.3x 5.7Lmm: 2000H, 6.3Φx7.7L, 8Φx 6.5L, 10Φx7.7L: 3000H, ΦD ≥8mm: 5000H
Capacitance Change	Within ± 30% of initial value
Dissipation Factor	Less than 300% of the specified value
Leakage Current	Within the initial limit

Shelf Life


After storage for 1000h at + 105°C±2°C with no voltage applied and then being stabilized at +20°C, capacitors shall meet the limits specified in endurance.

Resistance to Soldering Heat

After reflow soldering and then being stabilized at +20°C, capacitors shall meet the following limits

Capacitance Change	Within ±10% of initial value
Dissipation Factor	Within the initial limit
Leakage Current	Within the initial limit

## DRAWING (Unit: mm)

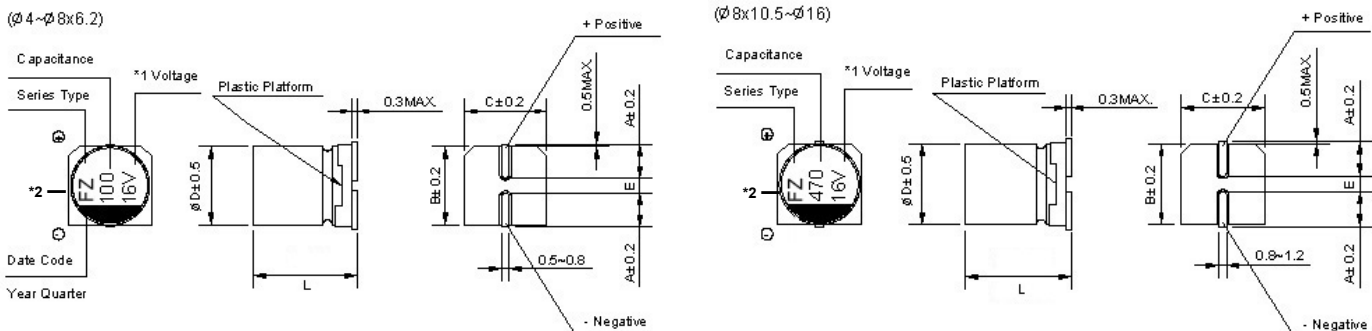

\*1 Voltage mark for 6.3V is [6V] or [6.3V]

\*2 Surface Marking Types: jbF, jF, FZ

ØDxL	4x5.8	5x5.8	6.3x5.8/7.7	8 x6.5/10.5	10x7.7	10x10.5/13.5	12.5 x13.5/16	16 x16.5
A	1.8	2.1	2.4	3.3	3.2	3.2	4.7	5.5
B	4.3	5.3	6.6	8.3	10.3	10.3	13	17
C	4.3	5.3	6.6	8.3	10.3	10.3	13	17
E	1.0	1.3	2.2	2.2 / 3.1	4.4	4.4	4.4	6.4
L	5.8±0.6	5.8±0.6	5.8/7.7±0.6	6.5/10.5±0.6	7.7±0.6	10.5/13.5±1.0	13.5/16±1.0	16.5±1.0

Please visit our website to get more update data, those data & specification are subject to change without notice.

## SMD Aluminum Electrolytic Capacitor – JCF

### Frequency coefficient Factor of Rated Ripple current

Frequency: F(Hz)	50Hz	120Hz	1kHz	10kHz $\cong$
Capacitance: C ( $\mu$ F)				
Full Capacitance	0.60	0.70	0.85	1.00

### DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT & IMPEDANCE

WV/V		6.3			10			16		
Cap/ $\mu$ F		0J			1A			1C		
10	100	--	--	--	--	--	--	4 $\times$ 5.8	1.45	80
22	220	4 $\times$ 5.8	1.45	80	4 $\times$ 5.8	1.45	80	5 $\times$ 5.8	0.80	150
33	330	4 $\times$ 5.8 (5 $\times$ 5.8)	1.45 (0.80)	80 (150)	5 $\times$ 5.8	0.80	150	5 $\times$ 5.8 (6.3 $\times$ 5.8)	0.80 (0.44)	150 (230)
47	470	5 $\times$ 5.8	0.80	150	6.3 $\times$ 5.8	0.44	230	6.3 $\times$ 5.8	0.44	230
68	680	--	--	--	--	--	--	6.3 $\times$ 5.8	0.44	230
100	101	5 $\times$ 5.8 (6.3 $\times$ 5.8)	0.80 (0.44)	150 (230)	6.3 $\times$ 5.8	0.44	230	6.3 $\times$ 5.8 (8 $\times$ 6.5)	0.44 (0.36)	230 (280)
150	151	6.3 $\times$ 5.8	0.44	230	6.3 $\times$ 5.8	0.44	230	6.3 $\times$ 7.7 (8 $\times$ 6.5)	0.36 (0.36)	280 (280)
220	221	6.3 $\times$ 5.8 (6.3 $\times$ 7.7)	0.44 (0.36)	230 (280)	6.3 $\times$ 7.7 (8 $\times$ 6.5)	0.36 (0.36)	280 (280)	6.3 $\times$ 7.7	0.36	280
330	331	6.3 $\times$ 7.7 (8 $\times$ 6.5) (8 $\times$ 10.5)	0.36 (0.36) (0.17)	280 (280) (450)	8 $\times$ 10.5 (10 $\times$ 7.7)	0.17 (0.17)	450 (450)	8 $\times$ 10.5 (10 $\times$ 7.7)	0.17 (0.17)	450 (450)
470	471	6.3 $\times$ 7.7 (8 $\times$ 10.5) (10 $\times$ 7.7)	0.36 (0.17) (0.17)	280 (450) (450)	8 $\times$ 10.5 (10 $\times$ 7.7)	0.17 (0.17)	450 (450)	8 $\times$ 10.5 (10 $\times$ 10.5)	0.17 (0.09)	450 (670)
680	681	8 $\times$ 10.5 (10 $\times$ 7.7)	0.17 (0.17)	450 (450)	10 $\times$ 10.5	0.09	670	10 $\times$ 10.5	0.09	670
1000	102	8 $\times$ 10.5	0.17	450	10 $\times$ 10.5	0.09	670	10 $\times$ 13.5 (12.5 $\times$ 13.5)	0.08 (0.07)	720 (820)
1500	152	10 $\times$ 10.5 (10 $\times$ 13.5)	0.09 (0.08)	670 (720)	10 $\times$ 13.5 (12.5 $\times$ 13.5)	0.08 (0.07)	720 (820)	Case size: $\phi$ D $\times$ L (mm)	Impedance ( $\Omega$ ) max at 100kHz, 20 $^{\circ}$ C	Rated ripple current mArms (100kHz, 105 $^{\circ}$ C)
2200	222	12.5 $\times$ 13.5	0.07	820	12.5 $\times$ 13.5	0.07	820			

Please visit our website to get more update data, those data & specification are subject to change without notice.

# SMD Aluminum Electrolytic Capacitor – JCF

## DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT & IMPEDANCE

WV/V		25			35			50		
Cap/μF		1E			1V			1H		
1	1R0	--	--	--	--	--	--	4×5.8	2.90	60
2.2	2R2	--	--	--	--	--	--	4×5.8	2.90	60
3.3	3R3	--	--	--	--	--	--	4×5.8	2.90	60
4.7	4R7	--	--	--	4×5.8	1.45	80	4×5.8 (5×5.8)	2.90 (1.52)	60 (85)
10	100	4×5.8	1.45	80	4×5.8 (5×5.8)	1.45 (0.80)	80 (150)	6.3×5.8	0.88	165
22	220	5×5.8	0.80	150	5×5.8 (6.3×5.8)	0.80 (0.44)	150 (230)	6.3×5.8	0.88	165
33	330	5×5.8 (6.3×5.8)	0.80 (0.44)	150 (230)	6.3×5.8	0.44	230	6.3×7.7	0.68	185
47	470	6.3×5.8	0.44	230	6.3×5.8	0.44	230	6.3×7.7 (8×6.5) (8×10.5)	0.68 (0.68) (0.34)	185 (185) (360)
68	680	6.3×5.8	0.44	230	6.3×7.7 (8×6.5)	0.36 (0.36)	280 (280)	8×10.5	0.34	360
100	101	6.3×7.7 (8×6.5)	0.36 (0.36)	280 (280)	6.3×7.7 (8×10.5)	0.36 (0.17)	280 (450)	8×10.5 (10×10.5)	0.34 (0.18)	360 (560)
150	151	8×10.5	0.17	450	8×10.5 (10×7.7)	0.17 (0.17)	450 (450)	10×10.5	0.18	560
220	221	8×10.5 (10×7.7)	0.17 (0.17)	450 (450)	8×10.5 (10×10.5)	0.17 (0.09)	450 (670)	10×10.5 (12.5×13.5)	0.18 (0.12)	560 (650)
330	331	8×10.5	0.17	450	10×10.5 (12.5×13.5)	0.09 (0.07)	850 (820)	12.5×13.5	0.12	650
470	471	10×10.5	0.09	670	10×10.5 (12.5×13.5)	0.08 (0.07)	720 (820)	--	--	--
680	681	10×13.5 (12.5×13.5)	0.08 (0.07)	720 (820)	--	--	--	Case size:φDxL (mm)	Impedan ce (Ω) max at 100kHz, 20°C	Rated ripple current mArms (100kHz, 105°C)
1000	102	12.5×13.5	0.07	820	--	--	--			

WV/V		63			80			100		
Cap/μF		1J			1K			2A		
3.3	3R3	--	--	--	5×5.8	5.00	25	--	--	--
4.7	4R7	5×5.8	2.90	60	6.3×5.8	3.00	40	--	--	--
10	100	6.3×5.8	1.50	80	6.3×7.7 (8×6.5)	2.40 (2.40)	60 (60)	--	--	--
22	220	6.3×7.7 (8×6.5)	1.20 (1.20)	120 (120)	8×10.5	1.30	130	8×10.5	1.30	130
33	330	8×10.5	0.65	250	8×10.5	1.30	130	10×10.5	0.70	200
47	470	8×10.5	0.65	250	10×10.5	0.70	200	10×10.5 (10×13.5) (12.5×13.5)	0.70 (0.40) (0.32)	200 (400) (500)
68	680	8×10.5	0.65	250	10×10.5 (12.5×13.5)	0.40 (0.32)	400 (500)	12.5×13.5	0.32	500
100	101	10×10.5 (12.5×13.5)	0.35 (0.16)	400 (800)	10×13.5 (12.5×13.5)	0.40 (0.32)	400 (500)	12.5×13.5	0.32	500
150	151	12.5×13.5	0.16	800	12.5×13.5	0.32	500	Case size:φDxL (mm)	Impedance (Ω) max at 100kHz, 20°C	Rated ripple current mArms (100kHz, 105°C)
220	221	12.5×13.5	0.16	800	--	--	--			

Please visit our website to get more update data, those data & specification are subject to change without notice.