

SMD Aluminum Electrolytic Capacitor – JCS

FEATURES

- Designed for surface mounting on high density circuit board.
- Emboss carrier tape packing system is available for automatic insertion.



Fig 1



Fig 2



Fig 3

Note: Fig 1 & 2: Diameter 4 ~ 10mm
Fig 3 : Diameter: ≥12.5mm

SPECIFICATIONS

Operating Temperature	-40°C ~ +85°C
Voltage Range	4V ~ 100V.DC
Capacitance Range	1 ~ 10000 μF
Capacitance Tolerance	±20% at 120Hz, 20°C
Leakage Current	Leakage current (Φ4~Φ10) ≤0.01CV or 3μA, whichever is greater (After 2 minutes application of rated voltage) Leakage current (Φ12.5) ≤0.03CV or 4μA, whichever is greater (After 1 minutes application of rated voltage)

Dissipation Factor (Tan δ)

Measurement Frequency: 120Hz, Temperature: 20°C

Rated Voltage (V)		4	6.3	10	16	25	35	50	63	100
Tan δ (Max.)	Φ4~Φ10	0.35	0.32	0.26	0.20	0.18	0.16	0.14	0.14	0.14
	Φ12.5	0.42	0.42	0.38	0.30	0.28	0.22	0.18	0.16	0.16

Stability At Low Temp.

Measurement Frequency: 120Hz

Rated Voltage (V)		4	6.3	10	16	25	35	50~100
Impedance Ratio ZT/Z20 (Max.)	Φ4~Φ10	Z(-25°C)/ Z(20°C)	7	4	4	3	2	2
		Z(-40°C)/ Z(20°C)	15	8	6	4	4	3
	Φ12.5	Z(-25°C)/ Z(20°C)	7	5	4	3	2	2
		Z(-40°C)/ Z(20°C)	17	12	10	8	5	4

Load Life

After 2000 hours application of rated voltage at 85°C, Capacitors meet the characteristics requirements listed below.

Capacitance Change	Within ± 20% of initial value (Within ± 30% of initial value for 4V)
Dissipation Factor	200% or less of initial specified value
Leakage Current	Initial specified value or less

Shelf Life


After leaving capacitors under no load at 85°C for 1000 hours, They meet the specified value for load life characteristics listed above.

Resistance to Soldering Heat

After reflow soldering and restored at room temperature, they meet the characteristics listed below.

Capacitance Change	Within ± 10% of initial value
Dissipation Factor	Initial specified value or less
Leakage Current	Initial specified value or less

DRAWING (Unit: mm)

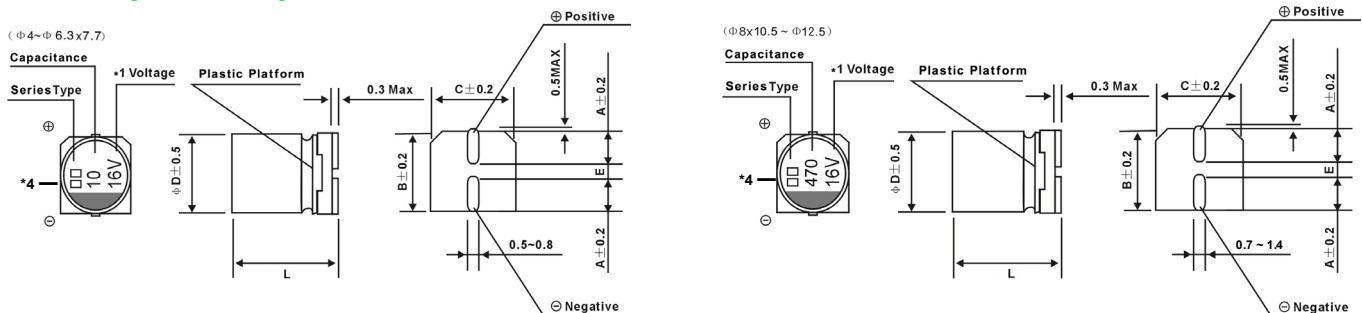

*1 Voltage mark for 6.3V is [6V] or [6.3V]
*4 Surface Marking Types: jbS, jS, CS, XS

ΦDxL	4x5.4	5x5.4	6.3x5.4	6.3x7.7	8x6.5	8x10.5	10x10.5	10x13.5	12.5x13.5
A	1.8	2.1	2.4	2.4	3.3	2.9	3.2	3.2	4.7
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	13.0
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	13.0
E	1.0±0.2	1.3±0.2	2.2±0.2	2.2±0.2	2.2±0.2 / 3.1±0.2	3.1±0.2	4.4±0.2	4.4±0.2	4.8±0.6
L	5.4±0.6	5.4±0.6	5.4±0.6	7.7±0.6	6.5±0.6	10.5±0.6	10.5±0.6	13.5±1.0	13.5±1.0

Please visit our website to get more update data, those data & specification are subject to change without notice.

SMD Aluminum Electrolytic Capacitor – JCS

FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT

Frequency		50Hz	120Hz	1KHz	10KHz~
Coefficient	≦1000uF	0.70	1.00	1.20	1.30
	>1000uF	0.80	1.00	1.10	1.20

STANDARD SIZE

WV		4		6.3		10		16		25	
Cap.(μF)		0G		0J		1A		1C		1E	
4.7	4R7	--	--	--	--	--	--	--	--	4x5.4	13
10	100	--	--	--	--	--	--	4x5.4	18	4x5.4 5x5.4	14 20
15	150	--	--	--	--	--	--	4x5.4	25	5x5.4	27
22	220	--	--	4x5.4	20	4x5.4 5x5.4	20 25	4x5.4 5x5.4	20 27	5x5.4 6.3x5.4	25 36
33	330	4x5.4	18	4x5.4 5x5.4	22 27	4x5.4 5x5.4	22 30	5x5.4 6.3x5.4	28 31	5x5.4 6.3x5.4	29 44
47	470	4x5.4	24	4x5.4 5x5.4	23 30	5x5.4 6.3x5.4	30 49	5x5.4 6.3x5.4	30 48	6.3x5.4 8x6.5	48 80
56	560	4x5.4	27	5x5.4	32	6.3x5.4	40	6.3x5.4	52	6.3x5.4	48
68	680	5x5.4	31	5x5.4 6.3x5.4	41 43	6.3x5.4	50	6.3x5.4	56	6.3x5.4	50
100	101	5x5.4	39	5x5.4 6.3x5.4	40 50	5x5.4 6.3x5.4	40 53	6.3x5.4 6.3x7.7 8x6.5	60 109 100	6.3x5.4 6.3x7.7 8x6.5 8x10.5	80 91 100 180
150	151	6.3x5.4	52	6.3x5.4	55	6.3x5.4	62	6.3x7.7 8x6.5	80 120	6.3x7.7 8x10.5	100 140
220	221	6.3x5.4	57	6.3x5.4 6.3x7.7	67 105	6.3x5.4 6.3x7.7 8x6.5	67 88 105	6.3x7.7 8x6.5 8x10.5	86 105 150	8x10.5 10x7.7	175 160
330	331	6.3x7.7	100	6.3x7.7 8x6.5	105 105	6.3x7.7 8x10.5	135 195	8x10.5 10x7.7	195 175	8x10.5 10x10.5	220 220
470	471	6.3x7.7	105	6.3x7.7 8x10.5	120 230	6.3x7.7 8x10.5 10x10.5	120 210 232	8x10.5 10x10.5	270 280	10x10.5	280
680	681	8x10.5	210	8x10.5	230	8x10.5 10x10.5	230 270	10x10.5	315	10x13.5	400
1000	102	8x10.5	230	8x10.5 10x10.5	290 315	10x10.5	315	10x10.5 10x13.5 12.5x13.5	315 390 500	12.5x13.5	580
1500	152	10x10.5	315	10x10.5	410	12.5x13.5	458	12.5x13.5	550	--	--
2200	222	--	--	12.5x13.5	620	12.5x13.5	680	--	--	Case Size	Ripple Current

Allowable Ripple (mA ms) at 85°C 120Hz

Please visit our website to get more update data, those data & specification are subject to change without notice.

SMD Aluminum Electrolytic Capacitor – JCS

STANDARD SIZE

WV Cap.(μF)		35		50		63		100	
		1V		1H		1J		2A	
1	010	--	--	4x5.4	8	4x5.4	8	4x5.4	8
1.5	1R5	--	--	4x5.4	9	4x5.4	9	6.3x5.4	12
2.2	2R2	--	--	4x5.4	11	4x5.4	11	6.3x5.4	14
3.3	3R3	--	--	4x5.4	12	5x5.4 6.3x5.4	12 30	6.3x5.4 6.3x7.7	23 41
4.7	4R7	4x5.4	15	4x5.4 5x5.4	14 19	5x5.4 6.3x5.4	18 23	5x5.4 6.3x5.4 6.3x7.7	15 21 35
10	100	4x5.4 5x5.4	18 25	5x5.4 6.3x5.4	20 28	6.3x5.4 6.3x7.7 8x6.5	24 39 25	6.3x5.4 6.3x7.7 8x6.5 8x10.5	25 35 50 90
22	220	5x5.4 6.3x5.4	34 29	6.3x5.4 6.3x7.7 8x6.5	42 51 70	6.3x7.7 8x6.5 8x10.5	48 55 98	8x10.5 10x10.5	84 120
33	330	6.3x5.4 8x6.5	46 85	6.3x5.4 6.3x7.7 8x6.5	60 60 70	6.3x7.7 8x10.5	49 112	10x10.5	120
47	470	6.3x5.4 6.3x7.7 8x6.5	55 78 85	6.3x7.7 8x6.5 8x10.5 10x10.5	63 85 119 170	8x10.5 10x10.5	119 160	10x10.5 10x13.5 12.5x13.5	120 160 250
56	560	6.3x7.7	65	6.3x7.7	90	10x10.5	210	--	--
68	680	6.3x7.7	69	8x6.5 8x10.5	70 110	10x10.5	140	10x13.5 12.5x13.5	180 300
100	101	6.3x7.7 8x10.5 10x7.7	80 80 160	8x10.5 10x10.5	145 175	10x10.5 10x13.5 12.5x13.5	196 210 270	12.5x13.5	380
150	151	8x10.5	175	10x10.5	200	--	--	--	--
220	221	8x10.5 10x10.5	185 250	10x10.5 10x13.5	220 280	12.5x13.5	470	--	--
330	331	10x10.5 10x13.5	300 330	10x13.5 12.5x13.5	295 420	--	--	--	--
470	471	10x10.5 10x13.5 12.5x13.5	324 375 520	--	--	--	--	--	--
680	681	12.5x13.5	530	--	--	--	--	Case size	Allowable ripple

Allowable Ripple (mA ms) at 85°C 120Hz

Please visit our website to get more update data, those data & specification are subject to change without notice.