


Premium Metallized Polypropylene Film Capacitors – Axial – JFX

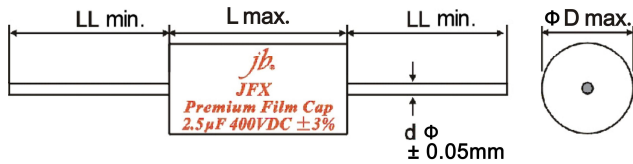

FEATURES

- Quick transient design
- High Precise Capacitance $\pm 3\%$, $\pm 5\%$
- Very Low Dielectric absorption factor
- Very Low Dissipation factor
- Very Low ESR
- Very Low Inductance
- Excellent handling of high current audio pulses

SPECIFICATIONS

Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55°C ~ +85°C
Capacitance range	0.047 ~ 100µF
Capacitance tolerance	$\pm 3\%$, $\pm 5\%$ 1KHz
Rated voltage	250V, 400V, 630V.DC
Withstand voltage	1.5VR 5S
Dissipation factor	≤ 0.0020 1KHz
Insulate the electric resistance	CR $\leq 0.33 \mu F$, I.R $\geq 15,000M\Omega$ CR $> 0.33 \mu F$, I.R $\geq 5,000S$
Leads Diameter	0.8, 1.0 Tinned Pure Copper Wire

STANDARD SIZE (mm)

For 0.047µF to 1µF, please consult to our sales for size.

µF	250V					µF	250V				
	Dissipation	ΦD	L	d	LL		Dissipation	ΦD	L	d	LL
1.0uF	≤ 0.0005	12.5	25	0.8	38	5.1uF	≤ 0.0006	21.5	31.5	0.8	38
1.1uF	≤ 0.0005	13	25	0.8	38	5.6uF	≤ 0.0006	22.5	31.5	0.8	38
1.2uF	≤ 0.0005	11.5	31.5	0.8	38	6.0uF	≤ 0.0006	23	31.5	0.8	38
1.3uF	≤ 0.0005	12	31.5	0.8	38	6.2uF	≤ 0.0006	23.5	31.5	0.8	38
1.5uF	≤ 0.0005	12.5	31.5	0.8	38	6.8uF	≤ 0.0007	24	31.5	0.8	38
1.6uF	≤ 0.0005	13	31.5	0.8	38	7.0uF	≤ 0.0007	19.5	46	0.8	38
1.8uF	≤ 0.0005	13.5	31.5	0.8	38	7.5uF	≤ 0.0007	20.5	46	0.8	38
2.0uF	≤ 0.0005	14	31.5	0.8	38	8.0uF	≤ 0.0007	21	46	0.8	38
2.2uF	≤ 0.0005	14.5	31.5	0.8	38	8.2uF	≤ 0.0007	21	46	0.8	38
2.4uF	≤ 0.0005	15.5	31.5	0.8	38	9.1uF	≤ 0.0007	22.5	46	0.8	38
2.5uF	≤ 0.0005	15.5	31.5	0.8	38	10uF	≤ 0.0007	23	46	1.0	38
2.7uF	≤ 0.0005	16	31.5	0.8	38	11uF	≤ 0.0007	24.5	46	1.0	38
3.0uF	≤ 0.0005	17	31.5	0.8	38	12uF	≤ 0.0008	25	46	1.0	38
3.3uF	≤ 0.0006	17.5	31.5	0.8	38	13uF	≤ 0.0008	26	46	1.0	38
3.5uF	≤ 0.0006	18	31.5	0.8	38	14uF	≤ 0.0008	27	46	1.0	38
3.6uF	≤ 0.0006	18.5	31.5	0.8	38	15uF	≤ 0.0008	28	46	1.0	38
3.9uF	≤ 0.0006	19	31.5	0.8	38	16uF	≤ 0.0008	29	46	1.0	38
4.0uF	≤ 0.0006	19	31.5	0.8	38	18uF	≤ 0.0008	30.5	46	1.0	38
4.3uF	≤ 0.0006	19.5	31.5	0.8	38	20uF	≤ 0.0008	32	46	1.0	38
4.5uF	≤ 0.0006	20	31.5	0.8	38	22uF	≤ 0.0009	33.5	46	1.0	38
4.7uF	≤ 0.0006	20.5	31.5	0.8	38	24uF	≤ 0.0009	35	46	1.0	38
5.0uF	≤ 0.0006	21	31.5	0.8	38	27uF	≤ 0.0009	37	46	1.0	38

Premium Metallized Polypropylene Film Capacitors – Axial – JFX

μF	250V					μF	250V				
	Dissipation	ΦD	L	d	LL		Dissipation	ΦD	L	d	LL
28uF	≤0.0009	34	56	1.0	38	51uF	≤0.0013	43.5	61	1.0	38
30uF	≤0.001	35	56	1.0	38	55uF	≤0.0013	45	61	1.0	38
33uF	≤0.001	36.5	56	1.0	38	56uF	≤0.0013	46	61	1.0	38
36uF	≤0.0011	38	56	1.0	38	62uF	≤0.0014	48	61	1.0	38
39uF	≤0.0011	39.5	56	1.0	38	68uF	≤0.0014	39.5	61	1.0	38
41uF	≤0.0012	40.5	56	1.0	38	75uF	≤0.0014	42	61	1.0	38
43uF	≤0.0012	41.5	56	1.0	38	82uF	≤0.0014	43.5	61	1.0	38
45uF	≤0.0012	41	61	1.0	38	91uF	≤0.0014	45.5	61	1.0	38
47uF	≤0.0012	42	61	1.0	38	100uF	≤0.0014	46	61	1.0	38
50uF	≤0.0013	43	61	1.0	38	--	--	--	--	--	--

μF	400V					μF	400V				
	Dissipation	ΦD	L	d	LL		Dissipation	ΦD	L	d	LL
1.0uF	≤0.0005	14.5	25	0.8	38	7.0uF	≤0.0007	23.5	46	0.8	38
1.1uF	≤0.0005	13	31.5	0.8	38	7.5uF	≤0.0007	24	46	0.8	38
1.2uF	≤0.0005	13.5	31.5	0.8	38	8.0uF	≤0.0007	25	46	0.8	38
1.3uF	≤0.0005	14	31.5	0.8	38	8.2uF	≤0.0007	25.5	46	0.8	38
1.5uF	≤0.0005	14.5	31.5	0.8	38	9.1uF	≤0.0007	26.5	46	0.8	38
1.6uF	≤0.0005	15	31.5	0.8	38	10uF	≤0.0007	28	46	1.0	38
1.8uF	≤0.0005	16	31.5	0.8	38	11uF	≤0.0007	29.5	46	1.0	38
2.0uF	≤0.0005	16.5	31.5	0.8	38	12uF	≤0.0008	30.5	46	1.0	38
2.2uF	≤0.0005	17.5	31.5	0.8	38	13uF	≤0.0008	31.5	46	1.0	38
2.4uF	≤0.0005	18	31.5	0.8	38	14uF	≤0.0008	32.5	46	1.0	38
2.5uF	≤0.0005	18.5	31.5	0.8	38	15uF	≤0.0008	33.5	46	1.0	38
2.7uF	≤0.0005	19	31.5	0.8	38	16uF	≤0.0008	31	56	1.0	38
3.0uF	≤0.0005	20	31.5	0.8	38	18uF	≤0.0008	33	56	1.0	38
3.3uF	≤0.0006	20.5	31.5	0.8	38	20uF	≤0.0008	34.5	56	1.0	38
3.5uF	≤0.0006	21	31.5	0.8	38	22uF	≤0.0009	36.5	56	1.0	38
3.6uF	≤0.0006	21.5	31.5	0.8	38	24uF	≤0.0009	38	56	1.0	38
3.9uF	≤0.0006	22.5	31.5	0.8	38	27uF	≤0.0009	40	56	1.0	38
4.0uF	≤0.0006	22.5	31.5	0.8	38	28uF	≤0.0009	41	56	1.0	38
4.3uF	≤0.0006	23.5	31.5	0.8	38	30uF	≤0.001	42	56	1.0	38
4.5uF	≤0.0006	24	31.5	0.8	38	33uF	≤0.001	44	56	1.0	38
4.7uF	≤0.0006	19.5	46	0.8	38	36uF	≤0.0011	46	56	1.0	38
5.0uF	≤0.0006	20	46	0.8	38	39uF	≤0.0011	48	56	1.0	38
5.1uF	≤0.0006	20	46	0.8	38	41uF	≤0.0012	47	61	1.0	38
5.6uF	≤0.0006	21	46	0.8	38	43uF	≤0.0012	48	61	1.0	38
6.0uF	≤0.0006	22	46	0.8	38	45uF	≤0.0012	49	61	1.0	38
6.2uF	≤0.0006	22	46	0.8	38	47uF	≤0.0012	50	61	1.0	38
6.8uF	≤0.0007	23	46	0.8	38	--	--	--	--	--	--

Premium Metallized Polypropylene Film Capacitors – Axial – JFX

μF	630V					μF	630V				
	Dissipation	ΦD	L	d	LL		Dissipation	ΦD	L	d	LL
1.0uF	≤0.0005	16	31.5	0.8	38	5.0uF	≤0.0006	26.5	46	0.8	38
1.1uF	≤0.0005	16.5	31.5	0.8	38	5.1uF	≤0.0006	27	46	0.8	38
1.2uF	≤0.0005	17	31.5	0.8	38	5.6uF	≤0.0006	28	46	0.8	38
1.3uF	≤0.0005	17.5	31.5	0.8	38	6.0uF	≤0.0007	29	46	0.8	38
1.5uF	≤0.0005	19	31.5	0.8	38	6.2uF	≤0.0007	29	46	0.8	38
1.6uF	≤0.0005	19.5	31.5	0.8	38	6.8uF	≤0.0007	30.5	46	0.8	38
1.8uF	≤0.0005	20.5	31.5	0.8	38	7.0uF	≤0.0007	31	46	0.8	38
2.0uF	≤0.0005	21.5	31.5	0.8	38	7.5uF	≤0.0007	32	46	0.8	38
2.2uF	≤0.0005	22.5	31.5	0.8	38	8.0uF	≤0.0007	33	46	0.8	38
2.4uF	≤0.0005	23.5	31.5	0.8	38	8.2uF	≤0.0007	33.5	46	0.8	38
2.5uF	≤0.0005	24	31.5	0.8	38	9.1uF	≤0.0007	35	46	0.8	38
2.7uF	≤0.0006	24.5	31.5	0.8	38	10.0uF	≤0.0007	32.5	56	1.0	38
3.0uF	≤0.0006	20.5	46	0.8	38	11.0uF	≤0.0007	34	56	1.0	38
3.3uF	≤0.0006	21.5	46	0.8	38	12.0uF	≤0.0008	35.5	56	1.0	38
3.5uF	≤0.0006	22	46	0.8	38	13.0uF	≤0.0008	37	56	1.0	38
3.6uF	≤0.0006	22.5	46	0.8	38	14.0uF	≤0.0008	38	56	1.0	38
3.9uF	≤0.0006	23.5	46	0.8	38	15.0uF	≤0.0008	39.5	56	1.0	38
4.0uF	≤0.0006	24	46	0.8	38	16.0uF	≤0.0008	40.5	56	1.0	38
4.3uF	≤0.0006	25	46	0.8	38	18.0uF	≤0.0008	43	56	1.0	38
4.5uF	≤0.0006	25.5	46	0.8	38	20.0uF	≤0.0008	45.5	56	1.0	38
4.7uF	≤0.0006	26	46	0.8	38	--	--	--	--	--	--

Please visit our website to get more update data, those data & specification are subject to change without notice.