Music Aluminum Foil and Film Metallized Polypropylene Capacitors – Axial – JMX

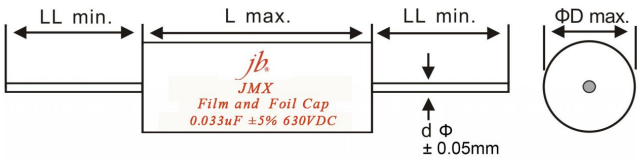

FEATURES

- Top of the range pure aluminum foil capacitor
- Very Low Dielectric absorption factor
- Very Low Dissipation factor, Very Low ESR, Very Low Inductance

SPECIFICATIONS

Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55℃ ～ +85℃
Capacitance range	0.022~0.47uF
Capacitance tolerance	±5% 1KHz
Rated voltage	630VDC
Withstand voltage	1.6VR 5S
Dissipation factor	≤0.0002 1KHz
Insulate the electric resistance	CR≤0.33μF, I.R≥15,000MΩ CR>0.33μF, I.R≥5,000S
Leads Diameter	Tinned Pure Copper Wire

STANDARD SIZE TABLE (mm)

μF	630V				
	Dissipation	OD	L	d	LL
0.022μF	≤0.0002	9	25	0.8	38
0.033μF	≤0.0002	10.5	25	0.8	38
0.047μF	≤0.0002	12	25	0.8	38
0.068μF	≤0.0002	11	31.5	0.8	38
0.1μF	≤0.0002	13	31.5	0.8	38
0.22μF	≤0.0002	17.5	31.5	0.8	38
0.33μF	≤0.0002	21	31.5	0.8	38
0.47μF	≤0.0002	20.5	36	0.8	38

Please visit our website to get more update data, those data & specification are subject to change without notice.