

Met Polypropylene Film Capacitor – JFL




FEATURES

- Non-inductive, epoxy dip coated, high moisture resistance.
- Dissipation factor is normally low and it is stable against high frequency and change of temperature.
- Recommended for high-frequency circuits like s-curve compensating circuit.
- High reliability because of its excellent Self-Healing performance.

SPECIFICATIONS

Operating Temperature	-40°C ~ +85°C
Rated Voltage(V.DC)	100V(2A), 250V(2E), 400V(2G), 630V(2J).
Capacitance Range	0.01 ~ 10.0 μF
Capacitance Tolerance	±5%, ±10%, ±20%
Insulation Resistance	U _R >100V C≤0.33μF IR≥25000MΩ
	C>0.33μF IR≥7500s
Dissipation Factor	U _R <100V C≤0.33μF IR≥12500MΩ
	C>0.33μF IR≥3750s.
	≤0.002 (at 1KHz) (typical 0.001 max)

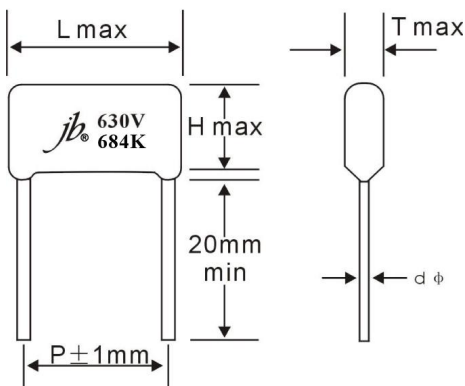

STANDARD SIZE (mm)

VDC Mfd	100 VDC (2A)					250 VDC (2E)				
	L	T	H	d	P	L	T	H	d	P
0.01	13	5.5	9	0.6	10	13	5.5	9	0.6	10
	10	5	8	0.6	7.5	10	5	8	0.6	7.5
0.012~0.015	13	6	10	0.6	10	13	6	10	0.6	10
	10.5	5	8	0.6	7.5	10.5	5	8	0.6	7.5
0.022~0.027	13	6	9	0.6	10	13	6	9	0.6	10
	10.5	6	10	0.6	7.5	10.5	6	10	0.6	7.5
0.033~0.036	13	6	10	0.6	10	13	6	10	0.6	10
	10.5	6.5	10	0.6	7.5	10.5	6.5	10	0.6	7.5
0.039~0.047	13	7	11	0.6	10	13	7	11	0.6	10
	10.5	6	10	0.6	7.5	10.5	6	10	0.6	7.5
0.056	10.5	6	10	0.6	7.5	13	6	10	0.6	10
0.068	13	6	10	0.6	10	13	6	10	0.6	10
0.1	13	7	11	0.6	10	13	7	11	0.6	10
	10.5	5.5	9	0.6	7.5	10.5	5.5	9	0.6	7.5
0.15	13	9	13	0.6	10	13	9	13	0.6	10
	10.5	6.5	11.5	0.6	7.5	10.5	6.5	11.5	0.6	7.5
0.22	13	6	11	0.6	10	13	6	11	0.6	10
	10.5	6	11	0.6	7.5	18	7.5	11.5	0.8	15
0.33	18	6	11	0.6	15	18	9	14	0.8	15
	18	9	14	0.8	15	18	10.5	15	0.8	15
0.47	18	6	11	0.6	15	23	8.5	15	0.8	20
	18	9	14	0.8	15	18	10.5	15	0.8	15
0.68	23	6.5	13	0.8	20	23	8	15.5	0.8	20
	23	8	14.5	0.8	20	23	10	16.5	0.8	20
1.0	18	7.5	12.5	0.6	15	25	11.5	18	0.8	22.5
	23	8.5	15	0.8	20	23	11	18	0.8	20
1.2	18	8.5	13.5	0.6	15	25	12	19	0.8	22.5
	18	8.5	15	0.8	15	25	12	17.5	0.8	22.5
1.5	23	7	14	0.8	20	23	12	18.5	0.8	20
	31	10	19	0.8	27.5	31	10	19	0.8	27.5
2.2	23	8.5	15	0.8	20	25	14	21	0.8	22.5
	31	12	21	0.8	27.5	31	12	21	0.8	27.5
3.3	23	11	17	0.8	20	31	15	24	0.8	27.5
	31	15	24	0.8	27.5					

Please visit our website to get more update data, those data & specification are subject to change without notice.

Met Polypropylene Film Capacitor – JFL

STANDARD SIZE (mm)										
VDC Mfd	400 VDC (2G)					630 VDC (2J)				
	L	T	H	d	P	L	T	H	d	P
0.01	13	5.5	9	0.6	10	13	5.5	9	0.6	10
	10	5	8	0.6	7.5					
0.012~0.015	10.5	5	8	0.6	7.5	13	6	10	0.6	10
	13	6	10	0.6	10					
0.018~0.022	13	7	11	0.6	10	13	7	11	0.6	10
						18	5.5	9.5	0.6	15
0.033~0.036	13	6.5	10	0.6	10	13	6.5	10	0.6	10
	18	6.5	11.5	0.6	15	18	6.5	11.5	0.6	15
0.039	13	6	11	0.6	10	18	6.5	12	0.6	15
0.047	13	6.5	11.5	0.6	10	13	6.5	11.5	0.6	10
	18	7.5	12	0.6	15	17	7.5	12	0.6	15
0.068	13	6	10.5	0.6	10	13	8	13	0.6	10
	18	6	9.5	0.6	15	17	8.5	13.5	0.6	15
0.1	13	7	12	0.6	10	18	6.5	11	0.6	15
	18	6.5	11	0.6	15					
0.15	19	7.5	13	0.8	15	19	7.5	13	0.8	15
0.22	18	9	14.5	0.8	15	18	9	14.5	0.8	15
0.33~0.39	18	9	16	0.5	15	25	8.5	15	0.8	22.5
	23	7.5	14.5	0.8	20					
0.47	23	8	15	0.8	20	23	8	15	0.8	20
	25	9.5	16	0.8	22.5	25	9.5	16	0.8	22.5
0.56	23	9	15.5	0.8	20	25	10.5	17	0.8	22.5
	18	11	17.5	0.6	15	31	11	18	0.8	27.5
0.68	25	10.5	18	0.8	22.5	23	11.5	18	0.8	20
	23	11.5	18	0.8	20	31	11	18.5	0.8	27.5
	23	8	14	0.8	20					
0.82	25	10.5	17	0.8	22.5					
1.0	25	11.5	18	0.8	22.5	25	13	21	0.8	22.5
	23	10	16	0.8	20	31	13	22	0.8	27.5
	31	10	18	0.8	27.5					
1.5	23	12	20	0.8	20	31	16.5	25	0.8	27.5
	23	9	17	0.8	20					
	31	12	20	0.8	27.5					
2	25	13	21	0.8	22.5					
	23	10	16	0.8	20					
	31	14.5	22.5	0.8	27.5					
2.2	25	14	22	0.8	22.5					
	23	11	19	0.8	20					
	31	15	23	0.8	27.5					
3.3	23	14	22	0.8	20					
	31	18	26.5	0.8	27.5					

Please visit our website to get more update data, those data & specification are subject to change without notice.